



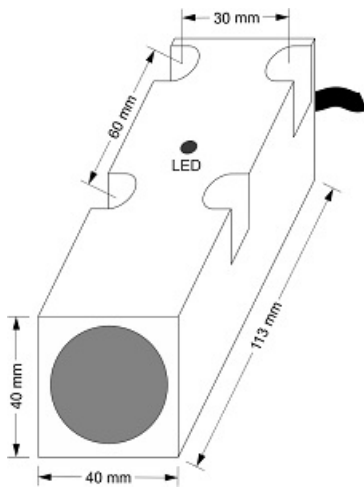

# IPS-320-AI-R40-N

Category: continuous pre cabled Inductive Sensor

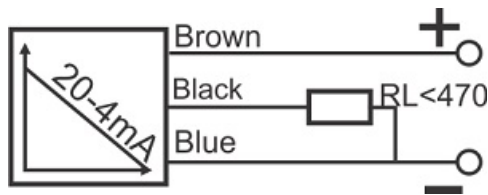

|                         |                      |
|-------------------------|----------------------|
| IPS-320-AI-R40-N        | Product Code         |
| REC. 40X40X113 PA or PP | housing              |
| 3                       | number of wires      |
| 20-4mA                  | output type          |
| 20 mm                   | switching distance   |
| -20~+60 °C              | temperature range    |
| IP66                    | influence protection |
| CABLE3X0.25-1.5m        | output               |
| TRANSISTOR              | output stage         |
| ANALOG                  | output function      |
| 15-30 VDC               | voltage range        |
| non flush (unshielded)  | mounting             |

Address: No.36 , Karimkhan Ave , Darvazeh Tehran ,Tabriz-Iran

Postal Code : 5157913399 | Post Inbox : 5341-51575 | Phone : 33330490-041 | Fax : 33318200-041

Website : [www.tabrizpeguh.com](http://www.tabrizpeguh.com) | Email : [info@tabrizpeguh.com](mailto:info@tabrizpeguh.com)