




# IPS-302-AV-12-P-S4

Category: continuous 4pin connector Inductive Sensor

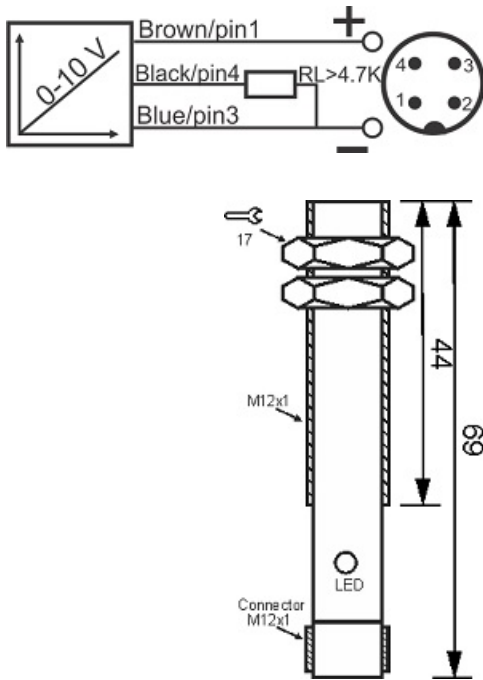

IPS-302-AV-12-P-S4	Product Code
M12X1Ni PLATED Brass	housing
3	number of wires
0-10V	output type
2 mm	switching distance
-20~+60 °C	temperature range
100 Hz	max operating frequency
IP66	influence protection
4Pin SOCKET	output
TRANSISTOR	output stage
ANALOG	output function
15-30 VDC	voltage range
50 mA	max output current
flush(shielded)	mounting

Address: No.36 , Karimkhan Ave , Darvazeh Tehran ,Tabriz-Iran

Postal Code : 5157913399 | Post Inbox : 5341-51575 | Phone : 33330490-041 | Fax : 33318200-041

Website : [www.tabrizpeguh.com](http://www.tabrizpeguh.com) | Email : [info@tabrizpeguh.com](mailto:info@tabrizpeguh.com)