



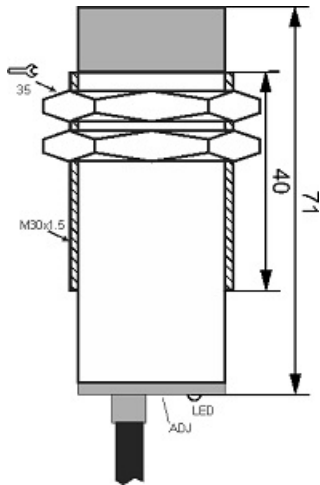

# CPS-220-CA-30

Category: pre cabled capacitive two-wire AC sensors

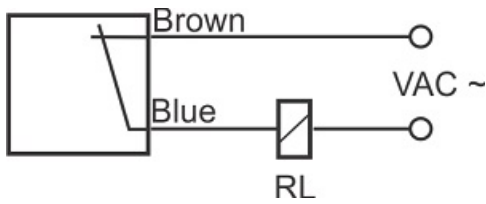

CPS-220-CA-30	Product Code
M30X1.5Ni PLATED brass	housing
2	number of wires
20 mm	switching distance
-20~+60 °C	temperature range
IP 66	influence protection
THYRISTOR	output stage
NC	output function
40-250VAC	voltage range
250 mA	max output current
2 Hz	max output ferequency
✓	indicator led
10 V	max drop voltage
3 mA	max noload or leakage current
0	revers voltage protection
0	short circuit protection
CABLE2X0.5-1.5m	output
non flush (unshielded)	mounting

Address: No.36 , Karimkhan Ave , Darvazeh Tehran ,Tabriz-Iran

Postal Code : 5157913399 | Post Inbox : 5341-51575 | Phone : 33330490-041 | Fax : 33318200-041

Website : [www.tabrizpeguh.com](http://www.tabrizpeguh.com) | Email : [info@tabrizpeguh.com](mailto:info@tabrizpeguh.com)