




IPS-245-OA-R80

Category: 2wire AC pre cabled inductive sensor

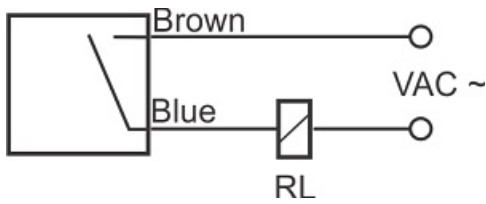

| | |
|------------------------|-------------------------------|
| IPS-245-OA-R80 | Product Code |
| REC. 80X80X40 PA or PP | housing |
| 2 | number of wires |
| 45 mm | switching distance |
| -20~+60 °C | temperature range |
| IP 67 | influence protection |
| CABLE2X0.5-1.5m | output |
| THYRISTOR | output stage |
| NO | output function |
| 90-250VAC | voltage range |
| 250 mA | max output current |
| 20 Hz | max output frequency |
| ✓ | indicator led |
| 10 V | max drop voltage |
| 3 mA | max noload or leakage current |
| 3 bar | pressure rate |
| non flush (unshielded) | mounting |
| 0 | revers voltage protection |
| 0 | short circuit protection |
| yes | pick voltage protection |

Address: No.36 , Karimkhan Ave , Darvazeh Tehran ,Tabriz-Iran

Postal Code : 5157913399 | Post Inbox : 5341-51575 | Phone : 33330490-041 | Fax : 33318200-041

Website : www.tabrizpeguh.com | Email : info@tabrizpeguh.com