




# OPS-41000-P-P18-TB-RC

Category: 4pin connector through-beam optoelectronic sensors-receiver

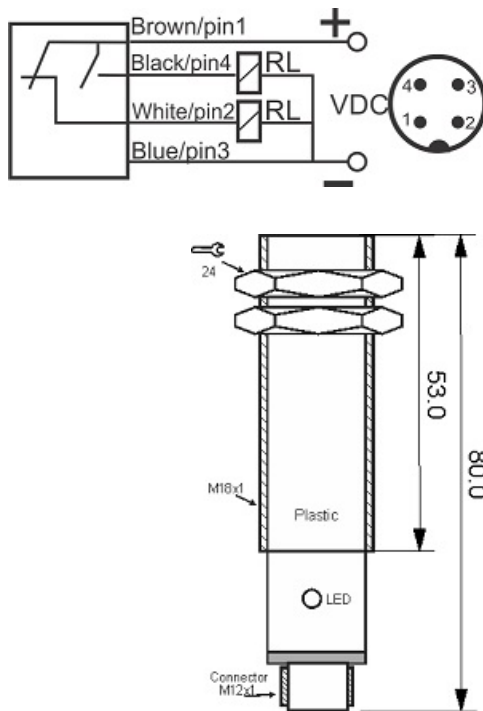

|                       |                           |
|-----------------------|---------------------------|
| OPS-41000-P-P18-TB-RC | Product Code              |
| M18X1 PBT             | housing                   |
| 4                     | number of wires           |
| PNP TRANSISTOR        | output stage              |
| NO+NC                 | output function           |
| 1000 cm               | switching distance        |
| 10-30VDC              | voltage range             |
| 250 mA                | max output current        |
| -20~+60 °C            | temperature range         |
| 100 Hz                | max output ferequence     |
| ✓                     | indicator led             |
| 2 V                   | max drop voltage          |
| 25 mA                 | max curtrent consumption  |
| IP 66                 | influence protection      |
| ✓                     | revers voltage protection |
| 0                     | short circuit protection  |
| 4Pin SOCKET           | output                    |

Address: No.36 , Karimkhan Ave , Darvazeh Tehran ,Tabriz-Iran

Postal Code : 5157913399 | Post Inbox : 5341-51575 | Phone : 33330490-041 | Fax : 33318200-041

Website : [www.tabrizpeguh.com](http://www.tabrizpeguh.com) | Email : [info@tabrizpeguh.com](mailto:info@tabrizpeguh.com)